

Products List

路線圖


Conductive Polymer AL.E. Capacitors

Polycap Series (系列)	Type (類型)	Features(特性)							Operating Temperature Range (工作溫度)	Working Voltage (工作電壓)	Capacitance (電容量範圍)	Load Life /Hrs(壽命)	Page (頁數)
			Standard	Lower ESR	Low Profile	High Voltage	Large Capacitance	Long Life/ High Reliability					
RA	Radial	High Voltage & Low ESR (高壓低阻抗)	●			●			-55 to +105°C	35-200V	1.8~330uF	2000	13
RH	Radial	High Voltage & Long Life to 5000hrs (高壓長壽命5000H)				●	●		-55 to +105°C	35-200V	1.8~330uF	5000	15
RV	Radial	High Voltage & 125°C Guaranteed (高壓耐高溫125°C)				●	●		-55 to +125°C	35-200V	1.8~330uF	2000	17
RX	Radial	High Voltage & 135°C Guaranteed (高壓耐高溫135°C)				●	●		-55 to +135°C	35-100V	4.7~120uF	1000	19
UPDATE RL	Radial	Super low ESR (超低阻抗)		●					-55 to +105°C	2.5-12V	220~3500uF	2000	21
RG	Radial	Low ESR(2.5~10VDC) (低阻抗)	●						-55 to +105°C	2.5-12V	220~3500uF	2000	24
RS	Radial	Low ESR(16~25VDC) (低阻抗)	●						-55 to +105°C	16-25V	22~1200uF	2000	27
UPDATE RN	Radial	Low Profile (小尺寸)			●				-55 to +105°C	2.5-35V	10~1000uF	2000	30
RF	Radial	Long Life to 5000hrs (長壽命5000H)		●			●		-55 to +105°C	2.5-25V	100~2700uF	5000	35
RQ	Radial	125°C Guaranteed (耐高溫125°C)		●			●		-55 to +125°C	2.5-16V	100~2700uF	2000	37
NEW RT	Radial	Large Capacitance & Large Profile (大容量大尺寸)					●		-55 to +105°C	6.3-16V	330~6000uF	2000	39

Liquid Aluminum Electrolytic Capacitors

Polycap Series (系列)	Type (類型)	Features (特性)	Operating Temperature Range (工作溫度)	Working Voltage (工作電壓)	Capacitance (電容量範圍)	Load Life /Hrs (壽命)	Page(頁數)
GS	Radial	Standard type (標準品)	-40 to +85°C	6.3-450V	0.1~22000µF	2000	51
KM	Radial	Guaranteed (耐高溫105°C)	-40 to +105°C	6.3-450V	0.1~33000	2000	54

Conductive Polymer AL.E. Capacitors Radial type

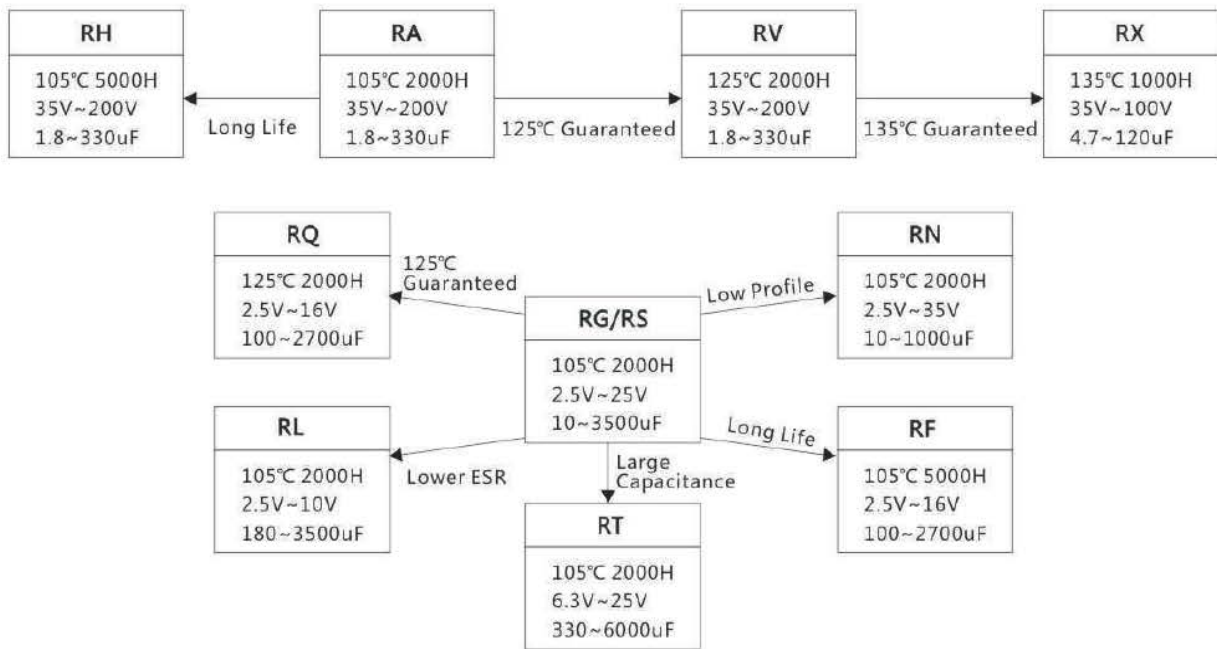

Liquid Aluminum Electrolytic Capacitors Radial type

